

Share parallel and USB printers



3-PORT PRINT SERVER

FOR BUSINESS USE

For environments that deploy multiple printers in close proximity



SHARE UP TO 3 PRINTERS

Share up to 3 printers from a single print server



COST SAVING

Save through purchasing a multi-port print server



MULTIPLE PORTS SAVE ON COSTS

The DP-300U 3-Port Print Server provides users with 3 available ports from a single device, avoiding the need to purchase and install separate print servers for each printer. At a fraction of the price it would cost three single-port print servers, the DP-300U is the smart choice for environments that have printers located within a close proximity. Simply connect your printers to the print server, with a printer cable to each device, and share your printers with multiple users on your network.

SIMULTANEOUS PRINTING ON ALL PRINTERS

Equipped with a powerful CPU, large memory and high speed printer ports, this print server makes printing your network files fast. The DP-300U allows all printers attached to this device to perform print jobs at the same time – as if your printers were connected to three separate single-port print servers.

MULTIPLE NETWORK OS SUPPORT

The DP-300U supports a wide range of network OS including: Windows 95/98/ME/NT 4.0/2000/XP, Apple MacOS with AppleTalk, Linux, Solaris, SCO Unix, IBM AIX and NetWare 5.x native NDS. This feature offers compatibility with all major network operating systems, providing you with added flexibility by ensuring that your files can be printed regardless of its environment.

REMOTE PRINTING SUPPORT

The DP-300U supports the Internet Printing Protocol (IPP), enabling remote users to output files to their office printer even when they are away from the site. HP PJL protocol is also supported for bi-directional network printer communication, providing network administrators with critical information about the network printer. Regardless of where you are, never worry about being unable to print out important files ever again with this print server's convenient functions.


WHAT THIS PRODUCT DOES

The DP-300U 3-Port Print Server is designed for sharing a group of printers located at a central site, such as a data center or computer room, over a network. It is equipped to share 2 parallel printers and 1 USB printer over a network. Supporting multiple network operating systems, this device provides a high level of flexibility and performance to your office printing needs.

KEY FEATURES

- + 2 parallel printer ports
- + 1 USB 2.0 printer port
- + Auto-sensing 10/100Mbps Fast Ethernet port
- + Supports a wide range of printers
- + SNMP and MIB-II (RFC 1213) support for platform independent management
- + Bi-directional communication to collect and report information/status of attached printers
- + Supports Internet Printing Protocol (IPP)
- + Windows-based administrative program for easy setup/management of print ports
- + Easy Web-based configuration from any browser

YOUR NETWORK SETUP

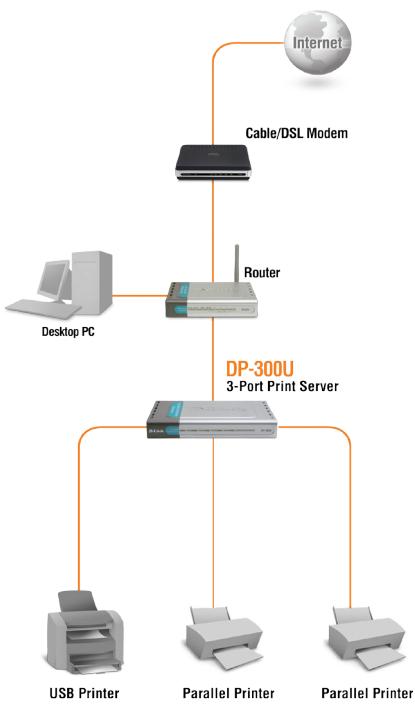

PRINTER PORTS

- + 2 DB-25 IEEE 1284 bi-directional parallel ports
- + USB 2.0 port

LAN PORT

- + RJ-45 10/100BASE-TX port

PARALLEL PORT BI-DIRECTIONAL COMMUNICATION

Hewlett-Packard PJL support

NETWORK PROTOCOLS

- + Transport protocols: TCP/IP, NetBEUI, AppleTalk/EtherTalk
- + TCP/IP protocols: BOOTP, SNMP, Telnet, TFT, FTP, LPD, RARP, DHCP

MANAGEMENT DIAGNOSTICS

- + Standard: SNMP
- + MIBs: MIB-II (RFC 1213)

CONFIGURATION RESET

Reset button

FLASH MEMORY

512K bytes

DIAGNOSTIC LED INDICATORS

- | | |
|---------|------------|
| + Power | + Link/Act |
| + USB | + LPT1 |
| + LPT2 | |

OS SUPPORT

- + Windows: 95, 98, ME, NT 4.0, 2000, XP, Vista
- + Apple MacOS with AppleTalk
- + Linux
- + Solaris
- + SCO Unix
- + IBM AIX
- + NetWare 5.x native NDS

INPUT POWER

- + 5V DC/2.5A

DIMENSIONS

193 mm (W) x 117 mm (D) x 34mm (H)

WEIGHT

300g

OPERATING TEMPERATURE

0 °C to 50 °C

STORAGE TEMPERATURE

-25 °C to 55 °C

HUMIDITY

5% to 95% non-condensing

TECHNICAL SPECIFICATIONS

EMISSIONS

- + FCC Class B
- + CE Class B
- + C-Tick+
- + UL
- + LVD (EN60950)

PACKAGE CONTENTS

- + DP-300U PRINT SERVER
- + CD-ROM WITH MANUAL AND PRINT SERVER ADMINISTRATION PROGRAM
- + QUICK INSTALLATION GUIDE
- + EXTERNAL POWER ADAPTER

PRINTER COMPATIBILITY LIST

- + HP: DESKJET 90CXI, DESKJET 640C, DESKJET 400, DESKJET 420, DESKJET 500, DESKJET 550C, DESKJET 560C, DESKJET 656C, DESKJET 845C, DESKJET 670C, DESKJET 695C, DESKJET 720C, DESKJET 810C, DESKJET 920C, DESKJET 930C, DESKJET 940C, DESKJET 948C, DESKJET 960C, DESKJET 890C, DESKJET 970CXI, DESKJET 995C, DESKJET 1125C, DESKJET 3320, DESKJET 3420, DESKJET 3425, DESKJET 3535, DESKJET 3650, DESKJET 3745, DESKJET 3845, DESKJET 5610, DESKJET 5625, DESKJET 5650, DESKJET 5850, CP 1700, BUSINESS INKJET 1000, LASERJET 1010, LASERJET 1020, LASERJET 1022, LASERJET 1100, LASERJET 1160, LASERJET 1200, LASERJET 1300 SERIES, LASERJET 2100, LASERJET 2100 SERIES, LASERJET 2200, LASERJET 2200D, LASERJET 2300D, LASERJET 3150, LASERJET 4000, LASERJET 4600PS, LASERJET 5000, LASERJET 5100SE, LASERJET 9000, LASERJET III, LASERJET 4P, LASERJET 4L, LASERJET 4V, LASERJET 5L, LASERJET 6P, LASERJET 6L, COLOR LASERJET 2600N, COLOR LASERJET 3550, COLOR LASERJET 4600PS, DESKJET 1120C, DESKJET 1125C
- + EPSON: STYLUS C41UX, STYLUS C42UX, STYLUS C43, STYLUS C45, STYLUS C60, STYLUS C61, STYLUS C80, STYLUS C405, PHOTO R31, PHOTO 720, PHOTO 810, PHOTO 820, PHOTO 830, PHOTO 830U, PHOTO 890, PHOTO 900, PHOTO 1280, PHOTO 1290, PHOTO PM860PT, PHOTO CC550L, PHOTO CC570L, PHOTO CL750, PHOTO CL760, PHOTO MC-2000, PHOTO PM-680C, PHOTO PM-720C, PHOTO PM-730C, PHOTO PM-740C, PHOTO PM-740DU, PHOTO PM-750, PHOTO PM-780CS, PHOTO PM-790PT, PHOTO PM-800C, PHOTO PM-800DC, PHOTO PM-820C, PHOTO PM-820DC, PHOTO PM-830C, PHOTO PM-840C, PHOTO PM-850PT, PHOTO PM-860PT, PHOTO PM-870C, PHOTO PM-890C, PHOTO PM-G900, PHOTO PM-920C, PHOTO PM-930C, PHOTO PM-940C, PHOTO PM-950C, PHOTO PM-970C, PHOTO PM-980C, PHOTO PM-D1000, PHOTO PM-2200C, PHOTO PM-3300C, PHOTO PM-3500C, PHOTO PM-3700C, PHOTO PM-4000PX, PHOTO PM-A850, PHOTO PM-D750, PHOTO PM-D770, PHOTO PM-G700, PHOTO PM-G800, PHOTO PM-E100, PHOTO PM-E200, PHOTO PX-G5000, PHOTO PX-G920, PHOTO PX-5500, PHOTO PM-4000PX, PHOTO PM-G820, PHOTO PM-G720, PX-V500, PX-V630, PX-V700, PX-G930, PX-G900, PX-G5100, LP-1300, LP-1400, LP-1500C, LP-2000C, LP-2400, LP-2500, LP-6100, LP-7000C, LP-7500, LP-7700, LP-7800, LP-7900, LP-8900, LP-9000B, LP-9000C, LP-9100, LP-9400, LP-9500C, LP-9800C, LP-S5500, LP-9200B, LP-9200C, LP-V500, LP-4600PS, LP-V1000, LP-8800CP, LP-9800CPL, LP-9200CPL, LP-9100PS3, EPL-6200, STYLUS PHOTO 700, STYLUS PHOTO 710, STYLUS PHOTO 750, STYLUS PHOTO 870, STYLUS PHOTO 1200, STYLUS PHOTO 1270, STYLUS PHOTO EX, STYLUS PRO XL, STYLUS COLOR 400, STYLUS COLOR 440, STYLUS COLOR 460, STYLUS COLOR 480, STYLUS COLOR 600, STYLUS COLOR 640, STYLUS COLOR 660, STYLUS COLOR 740, STYLUS COLOR 800, STYLUS COLOR 850, STYLUS COLOR 860, STYLUS COLOR 900, STYLUS COLOR 1160, STYLUS COLOR 1500, STYLUS COLOR 1520, STYLUS COLOR 3000, STYLUS C60, LQ-100, LQ-300, LQ-550, LQ-570+, LQ-1070C+, LQ-2070, LQ-2170C, EPL-N2000, EPL-N2010, EPL-5500, EPL-5700, EPL-5800, PM-G730, PM-D600, PM-D800, TM-T88III
- + Canon: S100SP, S200SP, S300, S330, S400SP, S450, S520, S600, S750, S4500, S6300, S9000, PIXUS 850i, BJC55, BJC85, I850, IP1000, IP3000, IP4000, BJ-330, BJC-255SP, BJC-600, BJC-620, BJC-740, BJC-2000SP, BJC-4100, BJC-4300, BJC-4500, BJC-4550, BJC-6000, BJC-6500, BJC-7000, BJC-8200, Bubble Jet S520
- + Lexmark: Optra SE-3455, Optra T614, Optra W810, 4039 10R, Optra Color 45 C710, Optra E, Optra E+, Optra E310, Optra K1220, Optra M410, Optra M412, Optra N, Optra R+, Optra S1250, Optra S1855, Optra SC-1275, Optra SE-3455, Optra T614, Optra W810, Z53
- + IBM: 5577, 4039, 16L Infor Printer 20, Infor Printer 32
- + FUJITSU: 10V, 14V, DL-700, DL-3800
- + NEC: P2200, P3200, P5300, P6300, P7300
- + Kyocera: FS-1000, FS-1000+, FS-1920
- + Brother: HL-1260
- + OKI: ML-391, OL-400
- + Panasonic: KX-P 2023, KX-P 1624
- + FUTEK: 84+
- + Star: NX-2420
- + Citizen: GSX-230
- + Olivetti: JP450



©2007 D-Link Corporation/D-Link Systems, Inc. All rights reserved. D-Link and the D-Link logo are registered trademarks of D-Link Corporation or its subsidiaries in the United States and other countries. Other trademarks or registered trademarks are the property of their respective owners.

Release 03 (Dec. 2007)